


DIMENSIONAL DATA

All measurements are shown in inches.

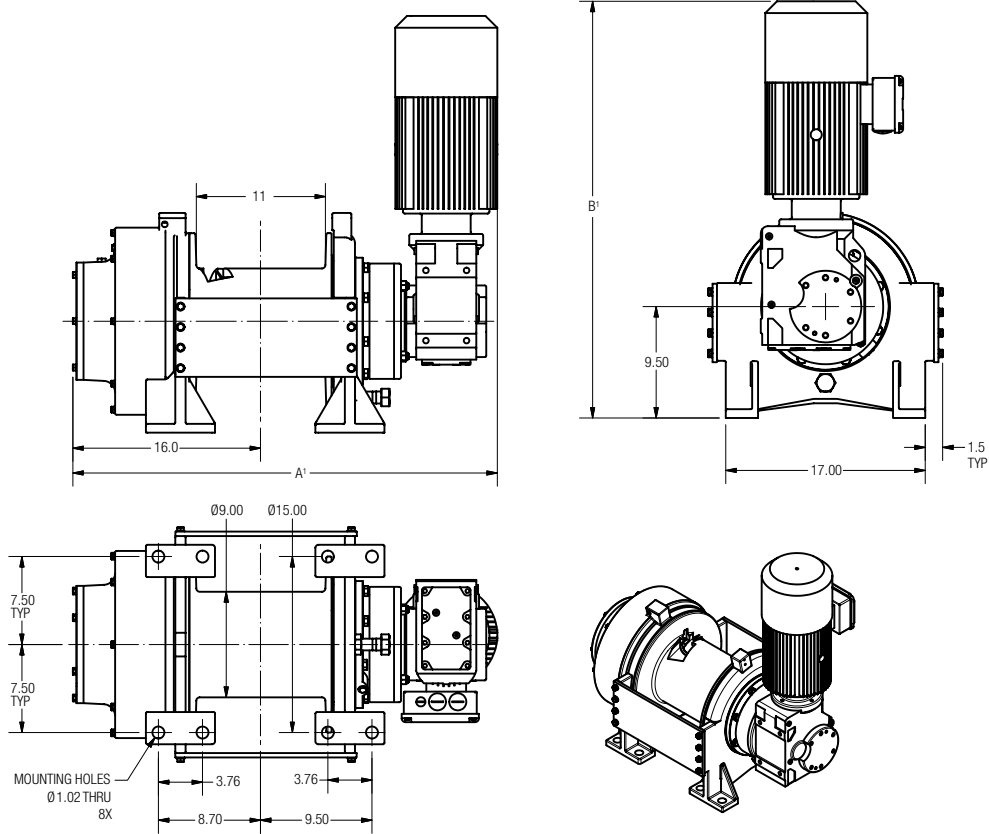

Wire Rope Capacity

1/2"	5/8"	3/4"
324'	208'	128'

PERFORMANCE

Model	Motor HP	Typical Weight (LBS)	Line Pull • Line Speed (Calculated with 3/4" wire rope)						Dimensions	
			First Layer		Mean Drum		Full Drum		A ¹	B ¹
			LBS	FPM	LBS	FPM	LBS	FPM		
WR30000	3.0	810	30,000	3.0	25,000	3.6	21,400	4.2	35.7	35.6
WR30000	5.0	810	30,000	4.7	25,000	5.7	21,400	6.6	35.7	35.6
WR30000	7.5	855	30,000	6.3	25,000	7.5	21,400	8.8	36.2	39.6
WR30000	10.0	895	30,000	8.8	25,000	10.5	21,400	12.3	36.9	41.6
WR40000	5.0	810	40,000	3.6	33,400	4.3	28,600	5.1	35.7	35.6
WR40000	7.5	855	40,000	5.4	33,400	6.5	28,600	7.6	36.2	39.6
WR40000	10.0	895	40,000	6.3	33,400	7.5	28,600	8.8	36.9	41.6

Performance based on 230/460 3Ø 60 Hz input power; other voltages available. Gearmotors can be rotated in 90° increments.

¹ Typical dimensions shown

CAUTION: The final determination as to the suitability of this product for any purpose is solely that of the user. Columbia products are not to be used to lift people or to lift anything over people.